

SM3-PRO

SYSTEM MANAGER



FEATURES

- Compact BlueBOLT enabled System Manager
- (Power/Energy/Network)
- 3 outlets (2 banks)
- 2-Port Network Switch
- AVM + Protect-or-Disconnect Protection
- (2) Accessory Ports for External Sensors/Triggers
- Mounting Kit Included
- Front panel bank override buttons and indicator lights



BENEFITS

- Ideal for entertainment systems (behind flat panel TV), digital signage, and network equipment hubs
- Protects connected equipment from power surges and dangerous voltage conditions (3 outlets)
- Filters AC for best electronics performance
- Provides remote power, energy and network management from any web enabled device at www.mybluebolt.com
- Reduces equipment issues/service calls with remote hard reboots
- Provides visibility on energy usage with cloud-based monitoring and tracking
- Reduces excess energy consumption with scheduled on/off commands
- Automatically reboots network equipment when connectivity is lost
- Sensor inputs provide flexible automation and notification based on environmental conditions




Core Brands, LLC 1800 S. McDowell Blvd., Petaluma, CA 94954 • 707-283-5900 • 800-472-5555
www.corebrands.com • www.panamax.com


©2015 Core Brands, LLC. All rights reserved. Panamax is a trademark of Core Brands, LLC a Nortek company.

SM3-PRO SYSTEM MANAGER

SM3-PRO MOUNTING BRACKET

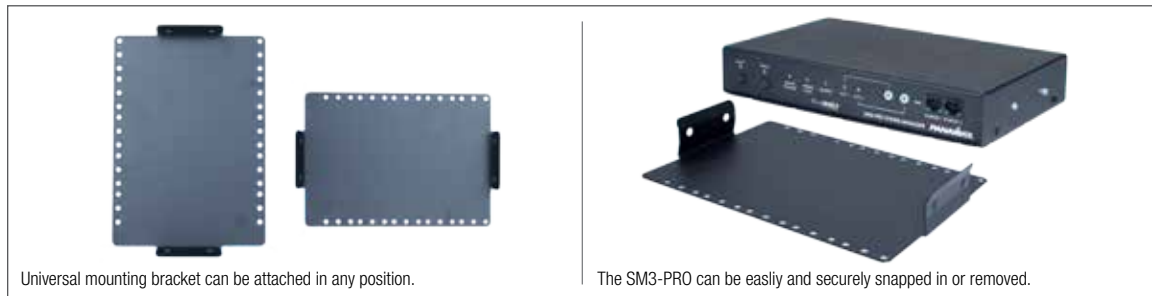

TYPICAL APPLICATIONS AND CONFIGURATIONS FOR SM3-PRO

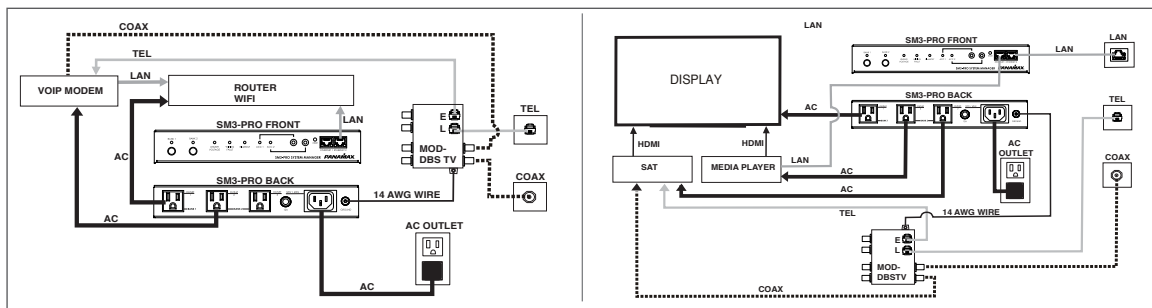

Sample setups to indicate the basic configuration for proper connections. Protecting all AC and signal lines will keep your system safe and ensure compliance with Panamax's Connected Equipment Policy.

AC POWER SPECIFICATIONS

Operating Voltage	120 Vac / 60Hz
Current Capacity	15 A
UL 1449 Voltage Protection Rating	330V L-N, 400V L-G, 400V N-G
UL 1449 Nominal Discharge Current	3,000A
Initial Clamping Level	200V
Energy Dissipation	1,800 Joules (8/20 μ s)

NETWORKING SPECIFICATIONS

Port Ethernet Switch	2 x RJ-45, 10/100Base-T
BlueBOLT®	Enabled

Overvoltage shutoff	134 Vac \pm 2 Vac
Undervoltage shutoff	95 Vac \pm 2 Vac
EMI / RFI Noise Filtration	-15.9dB @ 10kHz -43.5dB @ 100kHz -49.3dB @ 1MHz

Specifications subject to change due to product upgrades and improvements.



WEIGHTS, MEASUREMENTS AND UPC CODES

MODEL	PRODUCT DIMENSIONS	PRODUCT WEIGHT	SINGLE PACK DIMENSIONS	SINGLE PACK WEIGHT	SINGLE PACK UPC CODE	MASTER PACK QTY.	MASTER PACK WEIGHT	MASTER PACK DIMENSIONS	MASTER PACK UPC CODE
SM3-PRO	10" Length 7" Depth 1.6" Height	4.8 lbs.	12.25" Length 9.25" Depth 5" Height	5.25 LBS.	050616010108	6	32 LBS.	19" Length 13" Depth 15.5" Height	50050616010103



Core Brands, LLC 1800 S. McDowell Blvd., Petaluma, CA 94954 • 707-283-5900 • 800-472-5555
www.corebrands.com • www.panamax.com

©2015 Core Brands, LLC. All rights reserved. Panamax is a trademark of Core Brands, LLC a Nortek company.

SM3-PRO, Rev. D 5-8-15