

Breeze **PRO**

Peace of mind for your smart home

model number: BWS-1000



The Quick Read

- ✓ Smart Wind, Rain and Sunlight sensor.
- ✓ Simple app-guided setup and threshold settings
- ✓ Control multiple screens, louvers and shutters
- ✓ Requires a Bond Bridge Pro
- ✓ IP67 rated
- ✓ Solar powered, 2xAAA batteries and optional 12/24VDC

The Whole Story

Breeze Pro is a wind, rain, and sunlight sensor that will trigger your screens, louvers, and shutters based on user-defined thresholds.



Activate devices depending on:



Wind



Rainfall



Sunlight

You will need the Bond Bridge Pro

Breeze Pro must be paired with Bond Bridge Pro in order to work. The set up is extremely simple and guided by the app.

Real time data readings are available in the Bond Home app, so you can tell that the sensor is protecting your screens.

"Bond", "Bond Bridge Pro", and "Breeze Pro" are trademarks of Olibra, LLC. All other brand names are trademarks of their respective owners.


Specifications

Gen 1

Gen 2

RF Frequency	434 MHz	434 MHz
Transmission range	200 ft	200 ft
Data update interval	10 seconds	10 seconds
External Power Supply	12V DC (15V Max.)	12/24V DC
Built-in Solar Power	6.5V/4mA	6.5V/4mA
Backup Power	2xAA 1.5V batteries	2xAA 1.5V batteries
Operational Temperature	-31°F to 132°F	-31°F to 132°F
Requires Pairing with Bond Bridge Pro	✓	✓
Wi-Fi and internet is required only at setup	✓	✓
Warranty	3 years	3 years

Dimensions

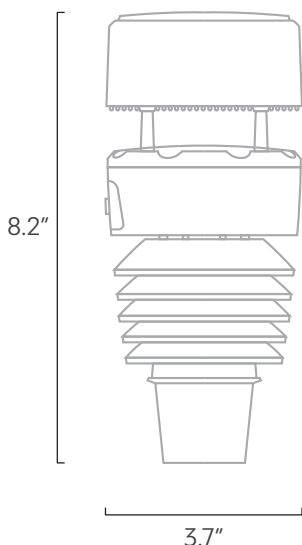

Fixture
1" OD pole

Color
Matte White


Cable Length
11 ft

Weight
0.92 lbs

Setting weather thresholds


Simple and guided threshold setup with the Bond Home app.

When a threshold limit is reached, lesser important thresholds won't activate any devices:

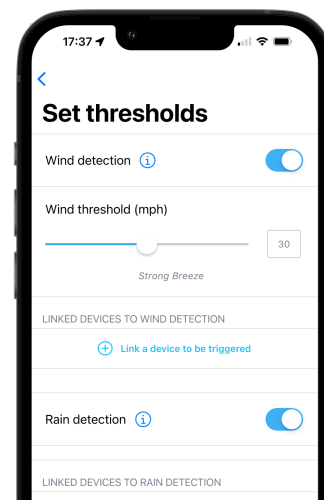

Easy app guided setup

No mysterious button press sequences. Just follow the in-app instructions

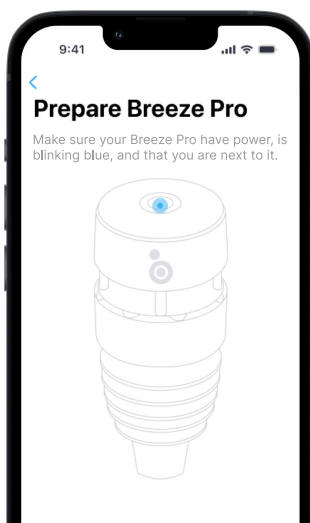

First priority



Second priority



Third priority

Example: when wind conditions are met all other triggers for lower priority rain and sunlight are ignored.