



www.seura.com
 PH. 920.857.9069
 FAX 920.857.9490

Reseller
-


Drawing ID Number
-

Date Created
30 SEP 2015

Revised Date
-

Item and Description
IWT-27.5

28"(W) X 17-3/4"(H) Recessed Indoor Waterproof TV with 27" TV

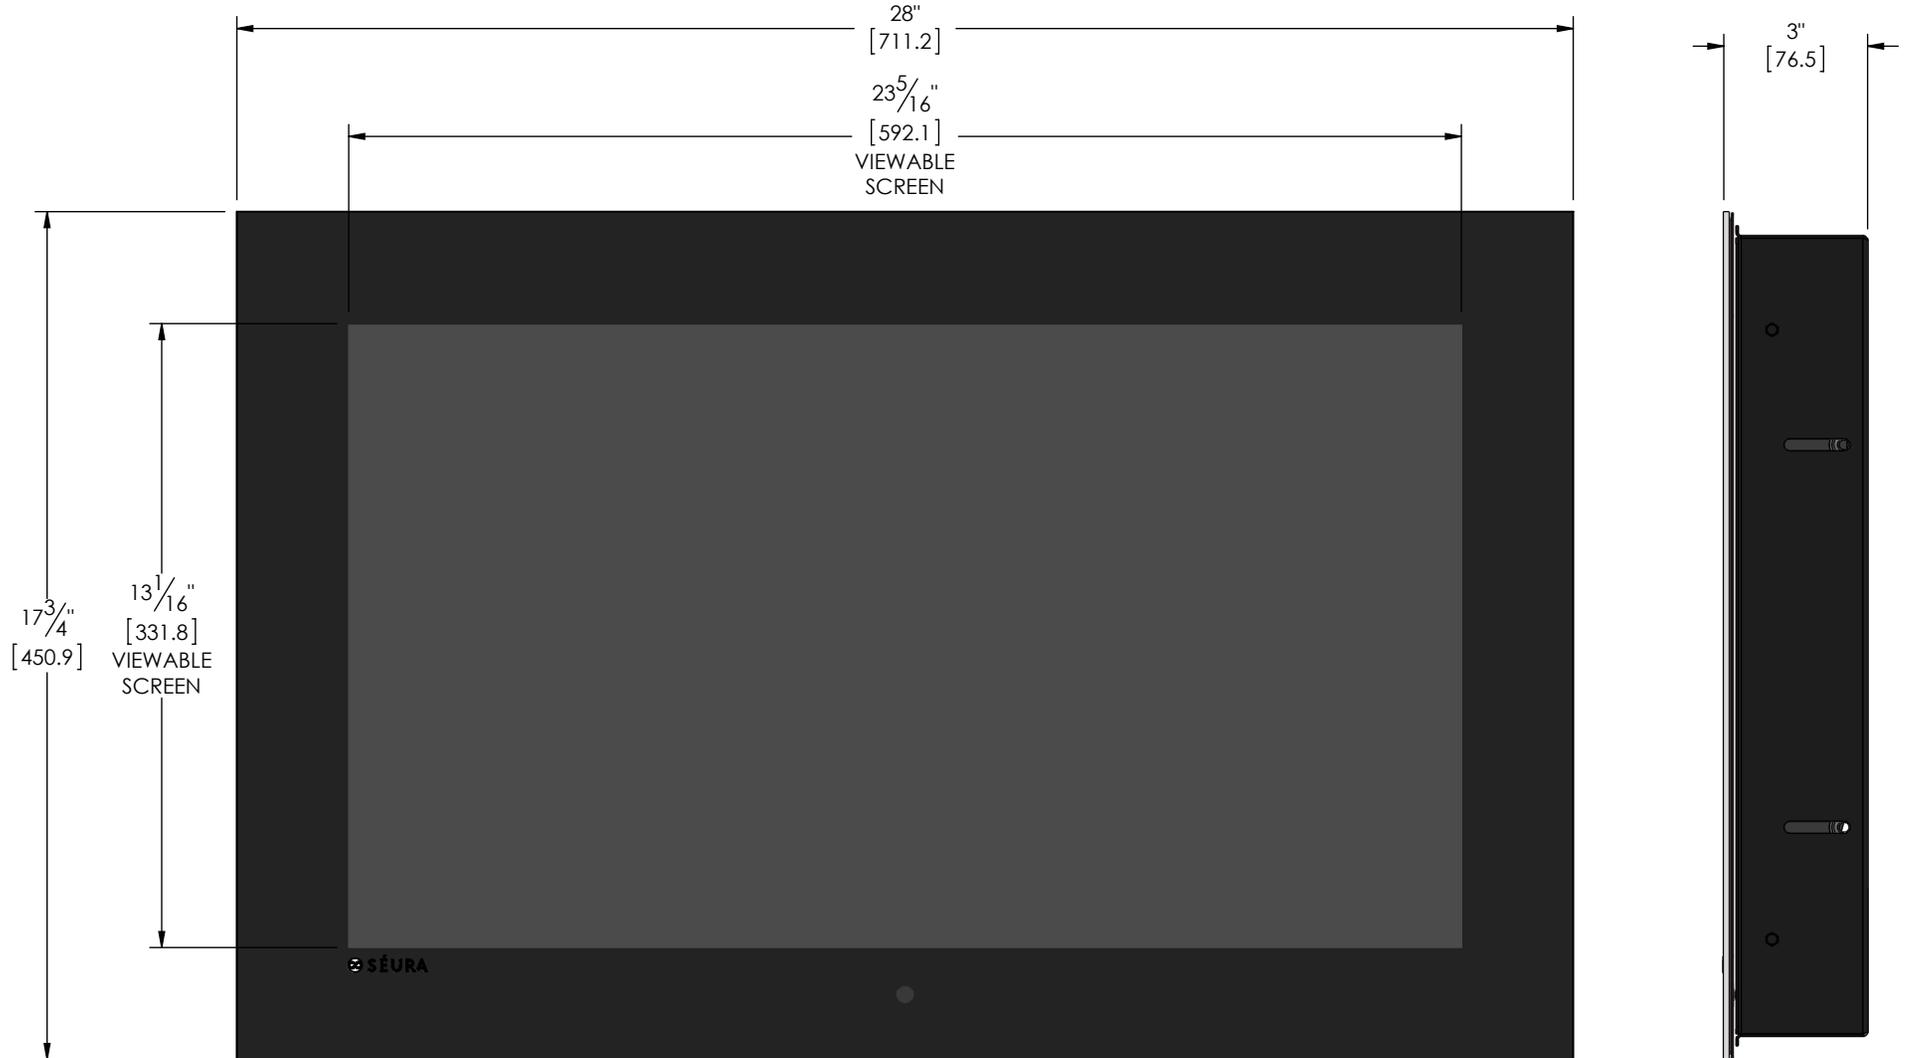

SIGNATURE:

DATE:

NOTE: PLEASE SIGN AND DATE THIS PAGE BEFORE RETURNING TO SEURA, SIGNIFYING YOU AGREE TO ALL SPECIFICATIONS SHOWN ON ALL DRAWING SHEETS. THE BUILD PROCESS WILL NOT BEGIN WITHOUT AN AUTHORIZED SIGNATURE. FOR DRAWINGS THAT REQUIRE REVISIONS, SEND THE REVISIONS TO SEURA NOTED ON THE ORIGINAL DRAWINGS. A REVISED DRAWING PACKAGE WILL BE RE-SENT FOR SIGNATURE.

TOLERANCES (UNLESS OTHERWISE NOTED)
 FRACTIONAL: ± 1/8"
 ANGULAR: ± 1.0°
 TWO PLACE DECIMAL: ± .03"
 THREE PLACE DECIMAL: ± .015"

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF THE MANUFACTURER. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF MANUFACTURER, IS PROHIBITED.

SHEET 1

Hydra 27-inch High-Definition LCD

Screen Size (Diagonal): 27-inch
 Format: 16:9
 Brightness: 450 cd/m²
 Viewing Angle: 170° Horizontal/Vertical
 Contrast: 4000:1
 Response Time: 6ms
 Native Resolution: 1920 X 1080
 Backlight: LED
 Menu Languages: English, French, Spanish

Tuner:

ATV: NTSC
 Digital: ATSC/QAM

Video:

75 Ohm Coaxial Antenna X 1
 Composite Video, Audio L, Audio R (RCA plugs) X 1
 Component YPbPr (RCA plugs) X 1
 S-Video Mini 4-pin DIN X 1
 VGA 15-pin D-sub Female X 1
 HDMI Type A X 2
 USB Type A X 1

Audio:

Amplified Output for External Speakers: 2 X 5W
 Amplified Output: Terminal Block
 Constant Line Output: 3.5mm Jack X 2

Control:


RS232 9-pin DB9 Female X 1
 IR IN: 3.5mm Jack X 1
 IR OUT: 3.5mm Jack X 4

Power:


Input: 110-240 VAC, 50-60Hz, 1.5A
 Type A NEMA Plug
 Requires GFCI Protected Outlet

****NO INTERNAL SPEAKERS****

BACK VIEW

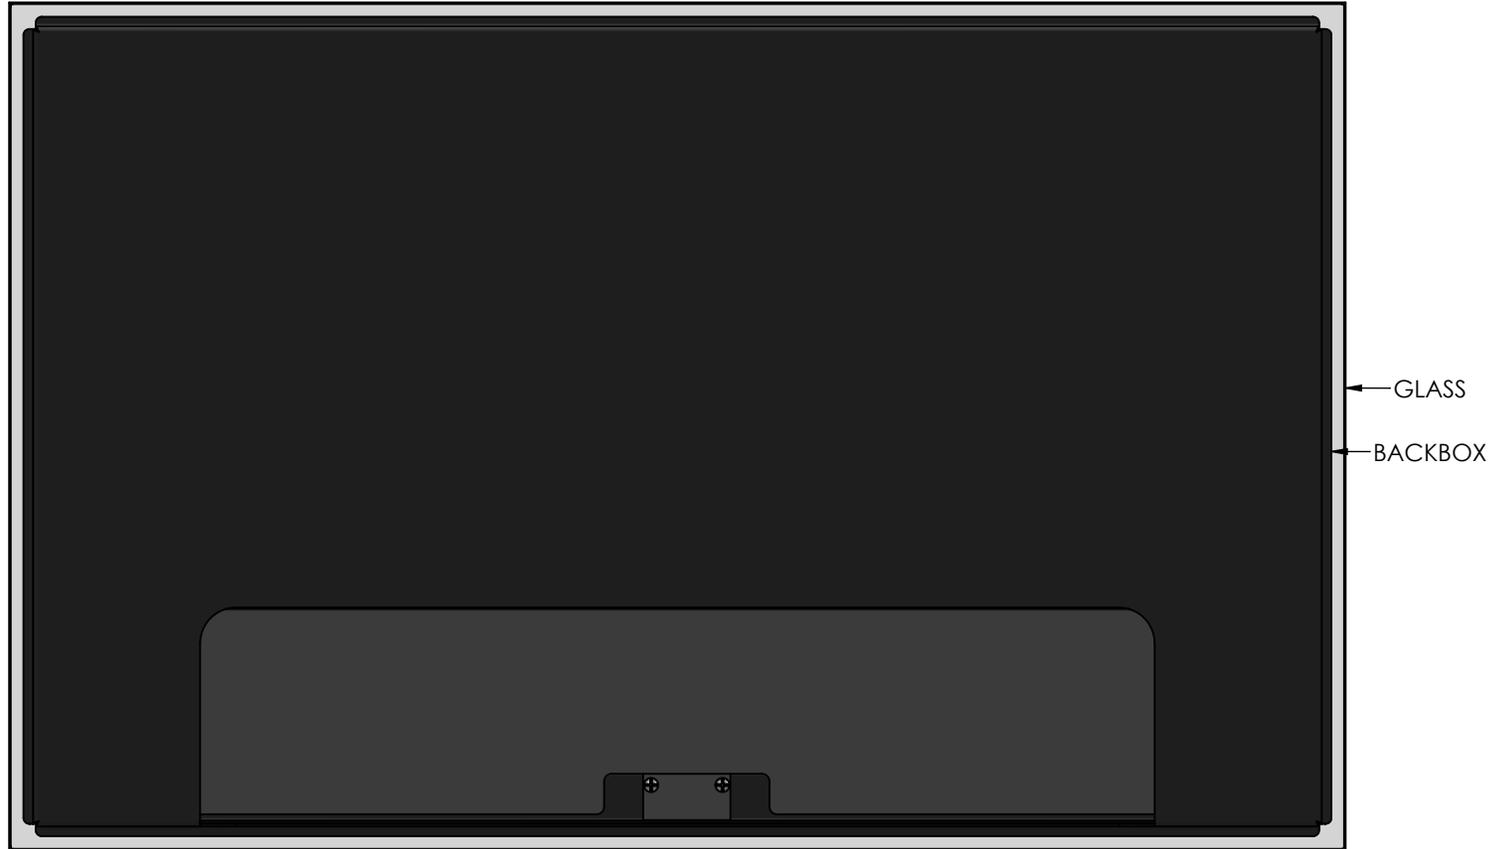

BOTTOM VIEW

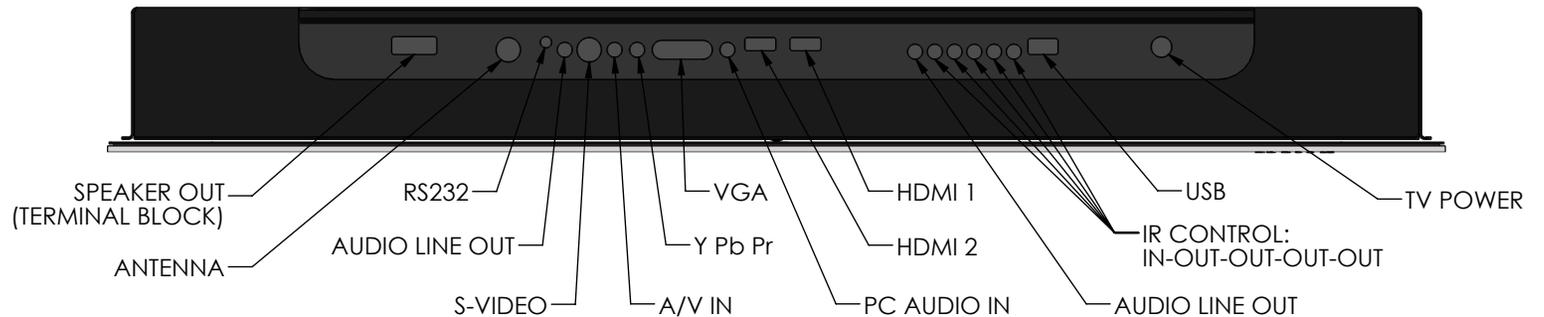


TOLERANCES	
FRACTIONAL	± 1/8 [3mm]
ANGULAR	MACH ±1.0°
ANGULAR	BEND ±1.0°
TWO PLACE DECIMAL	±.03 [.8mm]
THREE PLACE DECIMAL	±.015 [.4mm]

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF THE MANUFACTURER. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF MANUFACTURER, IS PROHIBITED.


SHEET
2

Item	Sales Order / Inv. Number	Date Created	Revised Date
IWT-27.5	-	30 SEP 2015	-

STEP 1: CUT ROUGH OPENING & INSTALL BACKBOX

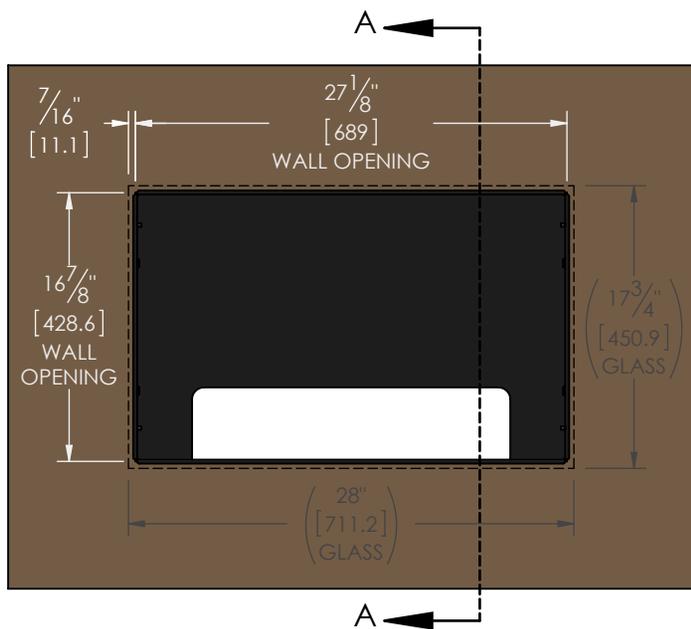


SECTION A-A

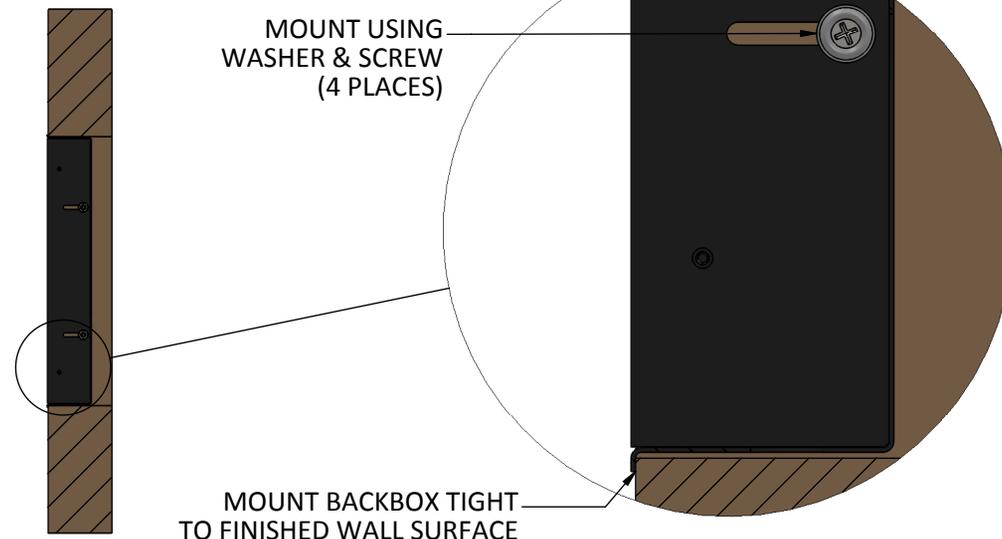


DETAIL VIEW
SCALE 1 : 2

STEP 2: VERIFY TV FUNCTIONALITY

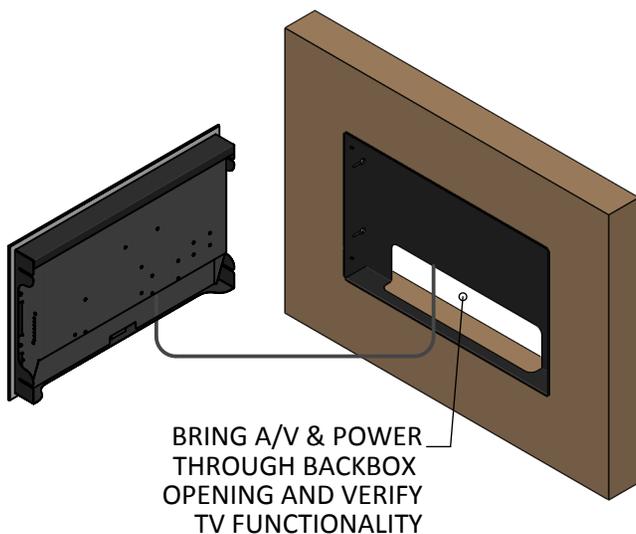

STEP 3: APPLY SEALANT & INSERT TV ASSEMBLY

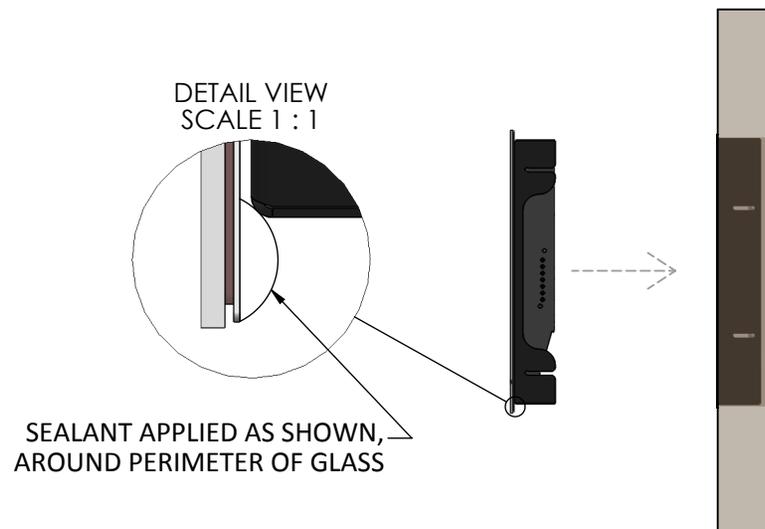

TOLERANCES

FRACTIONAL $\pm 1/8$ [3mm]
ANGULAR: MACH $\pm 1.0^\circ$
ANGULAR: BEND $\pm 1.0^\circ$
TWO PLACE DECIMAL $\pm .03$ [.8mm]
THREE PLACE DECIMAL $\pm .015$ [.4mm]

PROPRIETARY AND CONFIDENTIAL

THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE SOLE PROPERTY OF THE MANUFACTURER. ANY REPRODUCTION IN PART, OR AS A WHOLE, WITHOUT THE WRITTEN PERMISSION OF MANUFACTURER, IS PROHIBITED.

**SHEET
3**

Item
IWT-27.5

Sales Order / Inv. Number
-

Date Created
30 SEP 2015

Revised Date
-